

IS-MINI LED BLINKING SOUNDER
IS-mC1



protection
system



operating
temperature




Very economical visual and acoustic alarm.

- Certified for use in Ex-Zones 0, 1 and 2!
- Compact design with a diameter of just 88 mm.
- Alarm operated via certified zener barriers or galvanic isolators.
- 49 loud tones at 100 dB(A); super-bright LEDs in red, green, blue and yellow/amber for all applications.
- Volume control.
- Can be operated as combination unit or separately.
- Very well suited for fire alarm systems and direct control due to low power consumption.
- Self-synchronising sounder for clear tone perception.
- 2 different externally controllable tones.


PRODUCT	IS-mC1
Operating range	16–28 V DC
Nominal current consumption	48 mA (typical for connection to 24 V DC via 28 V / 300 Ω zener barrier)
Type of protection	“ia” inherently safe
Explosion protection	II 1G Ex ia IIC T4 –40 °C ... +60 °C Ta
Category (area of use)	1G (Zone 0) / 2G (Zone 1) / 3G (Zone 2)
Certificate / Testing body	SIRA 05 ATEX2084 X / SIRA
Sound pressure level	100 dB(A)
Sound level reduction	by –20 dB
Flash rate	can be set to 2 Hz or 1 Hz
Light source	LED ● ● ● ●
Storage temperature	–40 °C ... +70 °C
Relative humidity	90 %
Protection system (EN 60529)	IP 65
Duty cycle	100 %
Material	housing: ABS, self-extinguishing UL94V0 & 5VA, similar to RAL 3000 (flame red) lens: polycarbonate (PC)
Connecting terminals	0.5–2.5 mm ²
Cable entry	2x M20 (knock-outs prepared)
Weight	280 g

Power must be connected via a zener barrier (max. 28 V DC, 93 mA DC, 0.66 W) or a galvanic isolator, specified by the system certificate.

DIMENSIONS

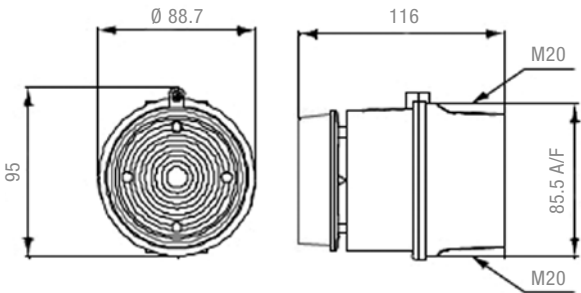

CONNECTION DIAGRAM

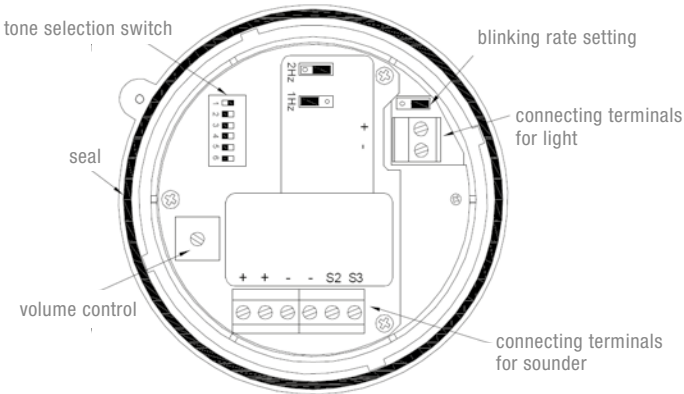

TONE TABLE

NO.	DESCRIPTION – FREQUENCY		STAGE		NO.	DESCRIPTION – FREQUENCY		STAGE	
			2	3				2	3
1	Continuous tone	340 Hz	2	5	25	Sweeping	2900 Hz 2400 Hz	29	5
2	Alternating tone, UK BS5839-1 (fire alarm, railway crossing)	1000 Hz 800 Hz	17	5	26	Simulated bell	1450 Hz	2	15
3	Slow whoop, evacuation alarm Netherlands NEN 2575	1200 Hz 500 Hz	2	5	27	Continuous tone	800 Hz	26	5
4	Sweeping (fast)	1000 Hz 800 Hz	6	5	28	Continuous tone	440 Hz	2	5
5	Continuous tone	2400 Hz	3	20	29	Sweeping (fast), UK BS5839-1	1000 Hz 800 Hz	7	5
6	Sweeping	2900 Hz 2400 Hz	7	5	30	Continuous tone	300 Hz	2	5
7	Sweeping (fast)	2900 Hz 2400 Hz	10	5	31	Sweeping	1200 Hz 660 Hz	26	5
8	Sweeping	1200 Hz 500 Hz	2	5	32	2-tone bell sound	800 Hz 650 Hz	26	15
9	Sawtooth, DIN-Ton 33404-3 Germany (emergency signal), PFEER PTAP	1200 Hz 500 Hz	15	2	33	Interrupted tone	745 Hz	2	5
10	Alternating tone	2900 Hz 2400 Hz	7	5	34	Alternating tone, Singapore	2000 Hz 1000 Hz	38	45
11	Interrupted tone	1000 Hz	2	5	35	Interrupted tone, Australian alert	420 Hz	35	5
12	Alternating tone	1000 Hz 800 Hz	4	5	36	Sweeping, IMO 3d, Germany KTA3901 evacuation alarm	1200 Hz 500 Hz	35	3
13	Interrupted tone	2400 Hz	15	5	37	Continuous tone	1000 Hz	9	45
14	Interrupted tone	800 Hz	4	5	38	Continuous tone	2000 Hz	34	45
15	Continuous tone	800 Hz	2	5	39	Interrupted tone	800 Hz	23	17
16	Interrupted tone	660 Hz	18	5	40	Alternating tone, France NFS 32-001 (fire alarm)	554 Hz 440 Hz	31	27
17	Alternating tone, France NFS 32-001 (fire alarm)	554 Hz 440 Hz	2	27	41	Motor siren	1200 Hz	2	5
18	Interrupted tone, Sweden SS031711 (air raid warning)	660 Hz	2	5	42	Motor siren	800 Hz	2	5
19	Sweeping, France NFC48-265	1600 Hz 1400 Hz	2	5	43	Continuous tone, PFEER gas alarm	1200 Hz	2	5
20	Continuous tone, Sweden SS031711 (all-clear signal)	660 Hz	2	5	44	Motor siren	2400 Hz	2	5
21	Alternating tone	554 Hz 440 Hz	2	5	45	Interrupted tone, PFEER (general alarm)	1000 Hz	38	34
22	Interrupted tone	554 Hz	2	5	46	Sawtooth, DIN-Ton 33404-3 Germany (emergency signal)	1200 Hz 500 Hz	47	37
23	Interrupted tone	800 Hz	6	5	47	Interrupted tone, PFEER (general alarm)	1000 Hz	46	37
24	Sweeping (medium), UK BS5839-1	1000 Hz 800 Hz	29	5	48	Interrupted tone, Australia AS2220, AS1610, AS1670	420 Hz	49	5
					49	Sweeping, IMO 3d, Germany KTA3901 evacuation alarm	1200 Hz 500 Hz	26	37

ARTICLE NO.	IS-mC1
LED colour	24 V DC
	32035804000
	32035805000
	32035806000
	32035807000