

Water-Cooled Solutions

guide



The complete water-cooled solution for industrial control enclosures.

Invented Original Filterfan™ Over 50 years ago

Otto Pfannenberg
FILTER - LUFTER



For over 50 years Pfannenberg has been a leader in thermal management solutions. From simple Fan Cooling and Packaged Air Conditioners to more complex water cooled applications, our expertise helps ensure industrial electronics operate at peak efficiency and extended service life.

Heat is a single common by-product of today's manufacturing machines that include the advanced automation technology required for both high speed operation and high precision. Components such as spindle motors, variable frequency drives, laser and x-ray sources all require cooling to operate properly and reliably - most often in very adverse manufacturing environments. Pfannenberg provides cooling solutions for a wide variety of equipment including machining centers, printing presses, wood working machines, welding systems, packaging machines and food processing machines, this experience allows us to apply proven cooling technology to new applications as well.

Our application engineering team works to match our standard products with as many applications as possible and also works closely with our product engineers to offer custom solutions when required. This continuous interaction allows continuous product development that is always in keeping with the ever changing needs of the market.


Understanding Thermal Management Products

Filterfans are appropriate when ambient air conditions are relatively cool and clean.



Air Conditioners provide a convenient packaged cooling solution for high ambient temperatures.

Water Cooling Products like our Air/Water Heat Exchangers, Water Cooled Air Conditioners and Packaged Water Chillers provide efficient cooling solutions when ambient conditions are at their worst.

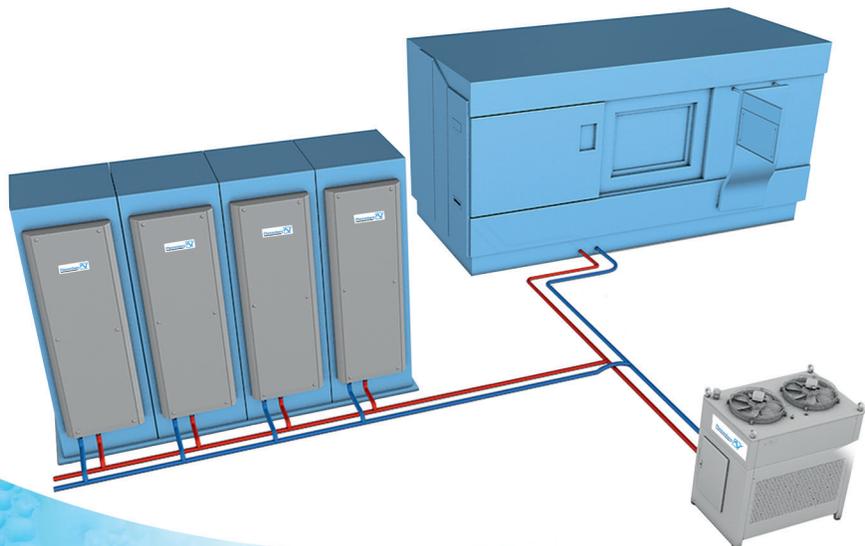


Cooling Electronics with Water

We understand that many users are hesitant to introduce a water-based cooling solution for electronic enclosure cooling. Over the years Pfannenberg's water cooled products have successfully cooled thousands of electronic applications worldwide. **So how do we do this?**

PWS 3000



ADVANTAGE

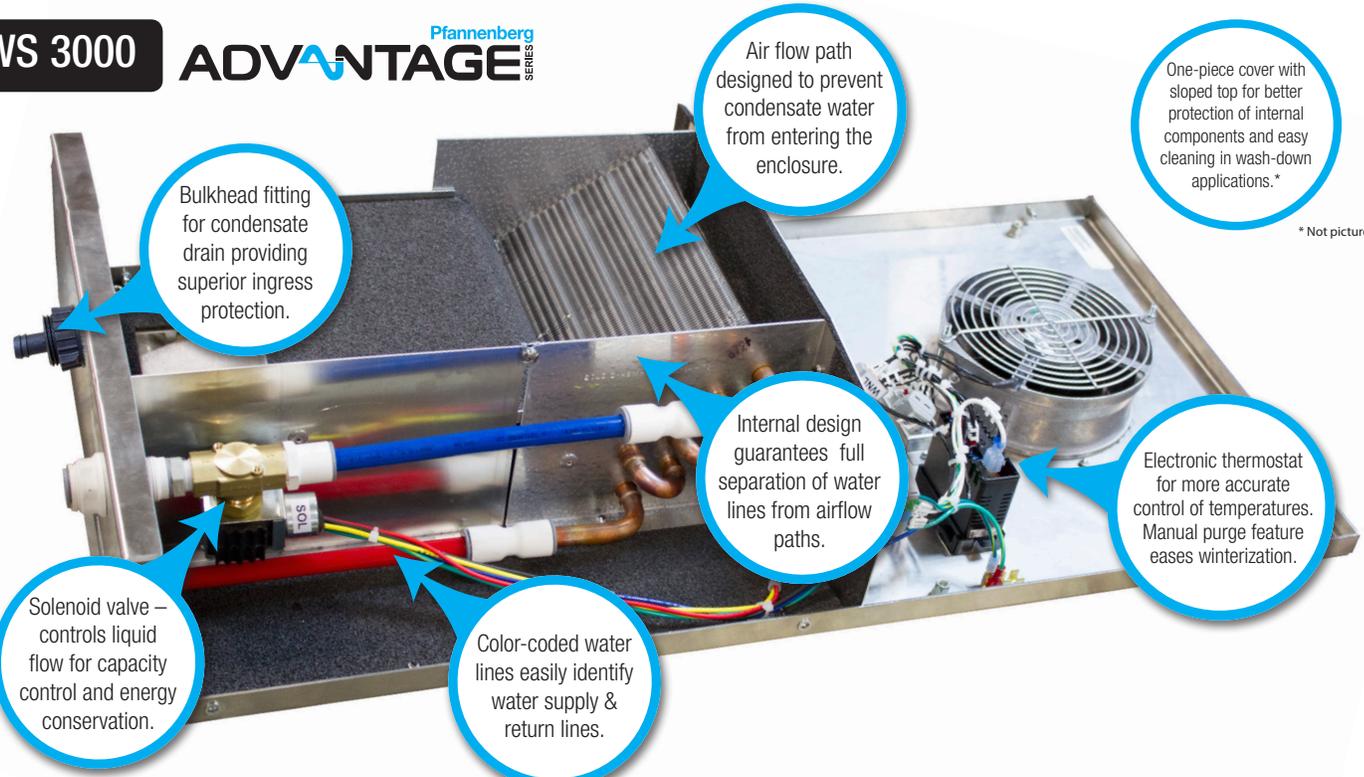

Bulkhead fitting for condensate drain providing superior ingress protection.

Air flow path designed to prevent condensate water from entering the enclosure.

One-piece cover with sloped top for better protection of internal components and easy cleaning in wash-down applications.*

Solenoid valve – controls liquid flow for capacity control and energy conservation.

Internal design guarantees full separation of water lines from airflow paths.


Electronic thermostat for more accurate control of temperatures. Manual purge feature eases winterization.

Color-coded water lines easily identify water supply & return lines.

* Not pictured.

Understanding Air Flow

Heated air is drawn from the top of the enclosure, cooled in the heat exchanger's water coil and delivered at the bottom in keeping with natural air circulation. The wide separation between the air inlet and air outlet prevents short circuiting.

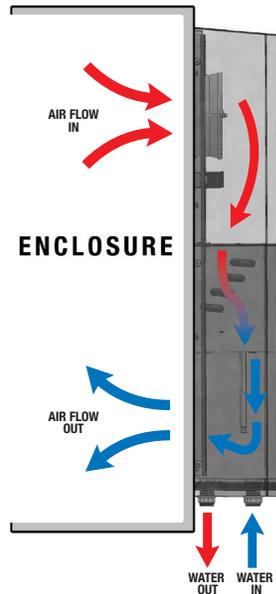

How do I know if water works for me?

- High Ambient
- Airborne Particulate
- High Utility Costs
- Multiple Units Needed
- Frequent Wash-down



Where Do We Get The Water From?



Well Water



City Water



Chiller



Cooling Tower Water

UNDERSTANDING THE BENEFITS OF CLOSED-LOOP LIQUID COOLING OF INDUSTRIAL PROCESS & ELECTRONICS

WITH MANUFACTURING SPACE AT A PREMIUM, MACHINE PACKAGES HAVE BECOME SMALLER AND LIQUID COOLING HAS EMERGED AS THE MOST EFFICIENT AND ECONOMICAL MEANS OF REMOVING PROCESS HEAT. LIQUID COOLING IS ESPECIALLY WELL ADAPTED TO HOT, DIRTY ENVIRONMENTS WHERE IT PROVIDES A METHOD OF REMOVING THE HEAT NOT ONLY FROM THE MACHINES, BUT ALSO FROM THE FACTORY ITSELF.

APPLICATIONS THAT CAN BENEFIT FROM WATER COOLING SOLUTIONS



AUTOMOTIVE

- ▶ SPINDLE MOTORS
- ▶ HYDRAULICS
- ▶ AUTOMATION DRIVES
- ▶ AUTOMATIC WELDERS



ENERGY

- ▶ SOLAR INVERTERS
- ▶ BOILER CONTROLS
- ▶ POWER PLANT ELECTRONICS



FOOD / BEVERAGE & PHARMACEUTICAL

- ▶ INGREDIENT MIXERS
- ▶ PRODUCT COOLING/DRYING
- ▶ PACKAGING AUTOMATION
- ▶ INSPECTION SYSTEMS
- ▶ OVEN CONTROLS



PAPER & PRINTING

- ▶ CHILL ROLLER COOLING
- ▶ INK COOLING
- ▶ CONVERTING MACHINES
- ▶ LAMP COOLING



WATER / WASTEWATER

- ▶ PUMP DRIVES



PLASTIC MANUFACTURING

- ▶ INJECTION MOLD COOLING
- ▶ EXTRUDER COOLING
- ▶ BLOW MOLD AIR COOLING
- ▶ MACHINE CONTROLS

COMMON DATA CONVERSIONS

1 TON	=	12,000 Btu/hr
1 BHP	=	2,545 Btu/hr
1 l/m	=	0.2642 gpm
1 kW	=	3,415 Btu/hr
1 kcal/h	=	4 Btu/hr
°F	=	1.8 °C + 32



FLOW
OF ANY MATERIAL

$$\text{BTU/HR} = \text{MASS FLOW RATE (LB/HR)} \times \text{SPECIFIC HEAT (BTU/LB } ^\circ\text{F)} \times \text{TEMPERATURE DIFFERENCE (} ^\circ\text{F)}$$

WHAT IS THE WATER SOURCE?

OPEN LOOP

ONCE-THROUGH
100% FRESH WATER
\$\$\$\$\$\$



CITY WATER




WELL WATER



CLOSED LOOP

RECIRCULATED
WATER
\$\$



COOLING TOWER
WATER



CHILLER



VS.

EST. COST OF OPEN LOOP WATER




≈ **\$10.00** PER THOUSAND GALLONS

{ 1/2 TON OF COOLING REQUIRES 576,000 GALLONS/YEAR }



\$5,760 PER YEAR

(BASED ON \$10.00 PER THOUSAND GALLONS AND 3 SHIFTS PER DAY OPERATION)

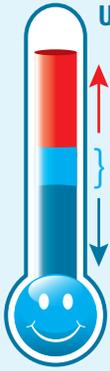


UNDERSTANDING TEMPERATURE

DANGER OF HEAT STRESS FAILURE

ELECTRONICS COOLING "SWEET SPOT"
85°F - 95°F

DANGER OF CONDENSATION

EST. ENERGY COST OF COOLING

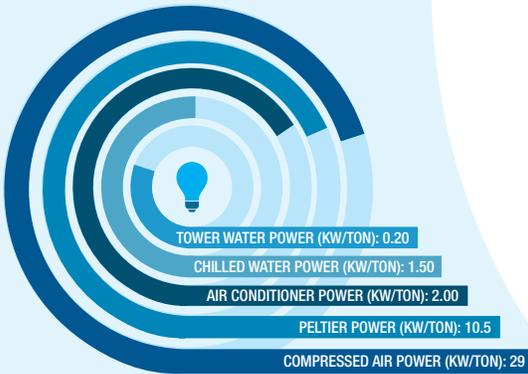

$$\text{\$} = \text{TONS} \times \text{KW/TON} \times \text{HOURS} \times \text{\$/KWH}$$

(FOR EXAMPLE, EST. ANNUAL COST OF COOLING FOR A 1/2 TON LOAD)



- COST OF COOLING WITH TOWER WATER:
 $0.5 \times 0.2 \text{ KW} \times 8000 \times \$0.07/\text{KWH} = \$56.00$
- COST OF COOLING WITH CHILLED WATER:
 $0.5 \times 1.5 \text{ KW} \times 8000 \times \$0.07/\text{KWH} = \$420.00$
- COST OF COOLING WITH AN AIR CONDITIONER:
 $0.5 \times 2 \text{ KW} \times 8000 \times \$0.07/\text{KWH} = \$560.00$
- COST OF COOLING WITH PELTIER COOLING UNIT:
 $0.5 \times 10.5 \text{ KW} \times 8000 \times \$0.07/\text{KWH} = \$2940.00$
- COST OF COOLING WITH COMPRESSED AIR:
 $0.5 \times 29 \text{ KW} \times 8000 \times \$0.07/\text{KWH} = \$8120.00$

(BASED ON \$0.07/KWH AND 3 SHIFTS PER DAY OPERATION)

EQUIPMENT SELECTION & RECOMMENDATIONS

IT'S IMPORTANT TO NOTE THAT PROPERLY SELECTED EQUIPMENT IS THE KEY TO COOLING EFFICIENCY.

AIR CONDITIONERS: PROVIDE A CONVENIENT MEANS OF EFFICIENT COOLING FOR MANY INDUSTRIAL CONTROL COOLING APPLICATIONS.

WATER SOLUTIONS: OFTEN ARE THE ONLY METHOD OF PROVIDING SUSTAINABLE EFFICIENCY & RELIABLE PERFORMANCE IN "HOSTILE" ENVIRONMENTS.

< "DIRTY HOSTILE" = HEAT + AIRBORNE PARTICULATE &/OR OILS >

< "CLEAN HOSTILE" = HEAT + REGULAR WASH DOWN W/ CAUSTICS >



IMPROVE PERFORMANCE

ELIMINATE ELECTRONIC FAILURES AND INCREASE EQUIPMENT UPTIME WITH PFANNENBERG LIQUID COOLED SOLUTIONS.

REDUCE MAINTENANCE

MAXIMIZE YOUR SYSTEM EFFICIENCIES WITH PFANNENBERG LIQUID COOLED SOLUTIONS.

PREVENT UNPLANNED REPAIRS

REDUCE YOUR MAINTENANCE BUDGETS WITH PFANNENBERG PREVENT SERVICE PLANS.

EFFICIENCIES

TOTAL COST OF OWNERSHIP (TCO)

STEP ONE: PLANT ASSESSMENT

PFANNENBERG ADVANTAGE (TCO)

IT'S A VALUE PROPOSITION WHICH PROVIDES SOLUTIONS TO PROBLEMS ENCOUNTERED BY THE AUTOMATION USER (PLANT) THAT ARE ASSOCIATED WITH THERMAL MANAGEMENT PRODUCTS. IT ALLOWS PFANNENBERG TO TAKE THE EXPERIENCE GAINED IN SUPPLYING THESE PRODUCTS TO THE MACHINE BUILDER AND EXTEND IT TO THE POINT OF USE WHERE IT CAN BE APPLIED TO MEET SPECIFIC CHALLENGES, AND/OR TO TAKE ADVANTAGE OF SPECIFIC OPPORTUNITIES.

STEP TWO: SOLUTION DEVELOPMENT

STEP THREE: ROI ANALYSIS

STEP FOUR: FULFILLMENT




Performance and Examples

STEP 1.
Calculate load


ENCLOSURES AND LOADS		
(est.) Load	Drive	Control Enclosures
2236 W	150 HP	36 x 72 x 24
4471 W	300 HP	48 x 72 x 24
4471 W	300 HP	48 x 72 x 24
7450 W	500 HP	60 x 72 x 24
7450 W	500 HP	60 x 72 x 24

26078 W TOTAL LOAD

STEP 2.
Select Properly Sized
Air/Water Heat Exchanger

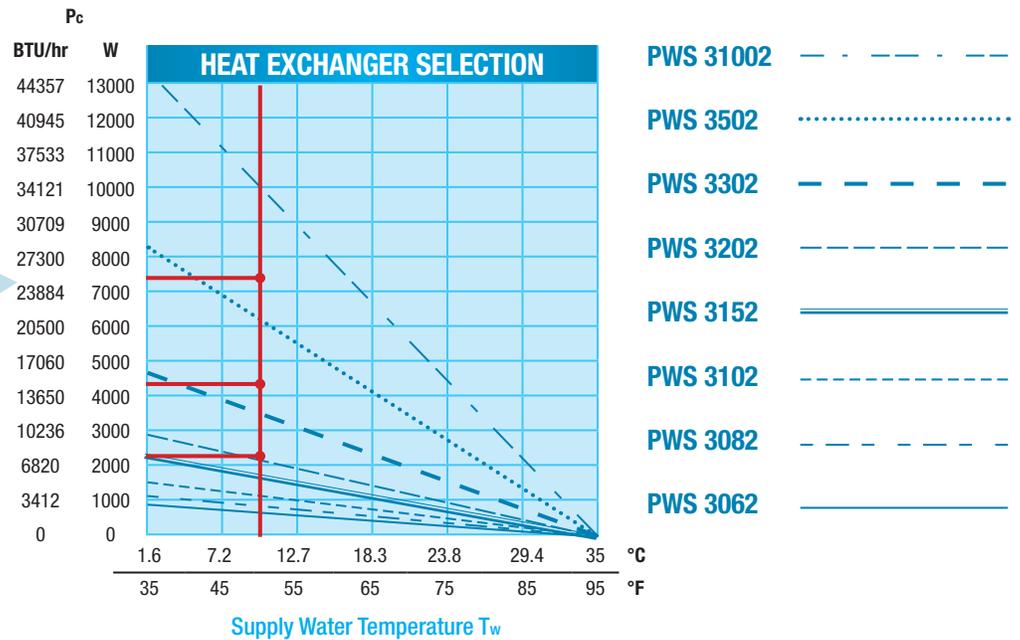

STEP 3.
Select Properly Sized
Chiller (if water is needed)

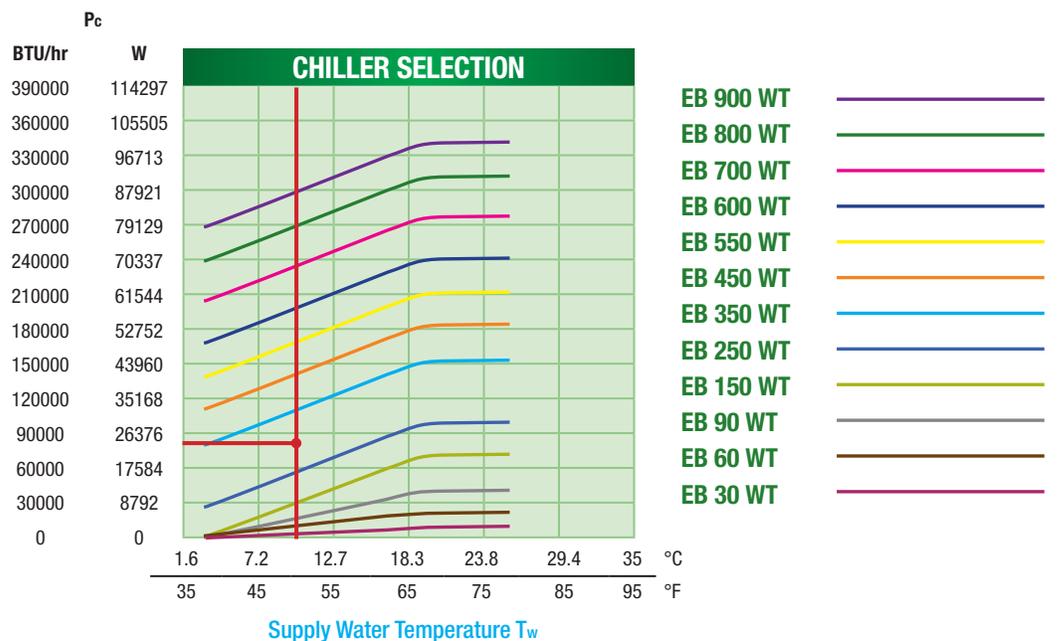

ADDITIONAL CHILLER SELECTION: Our Rack and CC Series Chiller Products are available for smaller applications. Please consult the Pfannenbergl Thermal Management Solutions Catalog for additional information.

Water Cooling Product Lines

Air to Water Heat Exchangers



Type	Cooling capacity Btu/h / W*	Rated voltage	Dimensions/Weight			
			W	L	D	Wt.
PWS 3062	2218 / 650	115 / 230 V	10.13 in 257 mm	24.14 in 613 mm	5.62 in 142.8 mm	22 lb 10 kg
PWS 3082	2900 / 900	115 / 230 V	10.13 in 257 mm	24.14 in 613 mm	5.62 in 142.8 mm	22 lb 10 kg
PWS 3102	3753 / 1100	115 / 230 V	15.80 in 401 mm	32.05 in 814 mm	6.28 in 159 mm	33 lb 15 kg
PWS 3152	5800 / 1700	115 / 230 V	11.78 in 299 mm	36.65 in 930 mm	8.16 in 207 mm	34 lb 15.5 kg
PWS 3202	7165 / 2100	115 / 230 V	15.76 in 400 mm	51.89 in 1318 mm	9.07 in 230 mm	62 lb 28 kg
PWS 3302	12283 / 3600	115 / 230 V	15.76 in 400 mm	51.89 in 1318 mm	9.07 in 230 mm	66 lb 30 kg
PWS 3502	21496 / 6300	115 / 230 V	15.76 in 400 mm	57.09 in 1450 mm	8.60 in 218 mm	73 lb 33 kg
PWS 31002	34121 / 10000	230 / 460 V	19.74 in 501 mm	65.52 in 1664 mm	12.10 in 307 mm	126 lb 57 kg

Highlighted units above are the selections based on sample calculations found in the performance and example curves on the previous page.

Model	Capacity			Power Supply V/Ph/Hz	Dimensions/Weight			
	Btu/hr	kW	Tons		W	L	H	Wt.
Rack 1100	4606	1.35	0.38	115 / 230 V	18 in	19 in	16 in	42 lb
Rack 1700	6995	2.0	0.58	115 / 230 V	18 in	19 in	16 in	42 lb
Rack 2400	9213	2.7	0.77	115 / 230 V	23 in	23 in	20 in	61 lb
CC 6101	4056	1.2	0.34	115 / 230 V	23.6 in	18.9 in	24.6 in	140 lb
CC 6201	6551	1.9	0.55	115 / 230 V	23.6 in	18.9 in	24.6 in	147 lb
CC 6301	9144	2.7	0.76	115 / 230 V	23.6 in	18.9 in	24.6 in	158 lb
CC 6401	13268	3.9	1.11	380 - 460 V	23.6 in	26.4 in	38.7 in	240 lb
CC 6501	19960	5.8	1.66	380 - 460 V	23.6 in	26.4 in	38.7 in	250 lb
CC 6601	23100	6.8	1.93	380 - 460 V	23.6 in	26.4 in	38.7 in	260 lb
EB 30 WT	16700	4.9	1.39	380 - 460 V	22 in	24 in	41 in	209 lb
EB 60 WT	21800	6.4	1.82	380 - 460 V	22 in	24 in	41 in	331 lb
EB 90 WT	43000	12.6	3.58	380 - 460 V	28 in	30 in	52 in	397 lb
EB 150 WT	67500	19.8	5.63	380 - 460 V	28 in	30 in	52 in	496 lb
EB 220 WT	88000	25.8	7.33	380 - 460 V	28 in	30 in	52 in	600 lb
EB 250 WT	98900	29.0	8.24	380 or 460 V	30 in	74 in	57 in	730 lb
EB 350 WT	151,100	44.2	12.59	380 or 460 V	30 in	74 in	57 in	850 lb
EB 450 WT	191,000	55.9	15.92	380 or 460 V	30 in	74 in	57 in	895 lb
EB 550 WT	210,600	61.7	17.55	380 or 460 V	30 in	74 in	57 in	920 lb
EB 600 WT	241,000	70.6	20.08	380 or 460 V	35 in	90 in	82 in	1250 lb
EB 700 WT	278,800	81.6	23.23	380 or 460 V	35 in	90 in	82 in	1450 lb
EB 800 WT	323,000	94.6	26.92	380 or 460 V	35 in	90 in	82 in	1630 lb
EB 900 WT	356,000	104.2	29.67	380 or 460 V	35 in	90 in	82 in	1680 lb

Highlighted units above are the selections based on sample calculations found in the performance and example curves on the previous page.

Chillers



Cooling Units - Water Cooled

(not pictured)

Type	Cooling capacity Btu/h / W*	Rated voltage
DTS 3145 WC	6000 - 8000 / 1283	400 / 460 V
DTS 3165 WC	6000 - 8000 / 1283	400 / 460 V
DTS 3185 WC	6000 - 8000 / 1283	400 / 460 V
DTS 3245 WC	10000 - 12000 / 1300	400 / 460 V
DTS 3265 WC	10000 - 12000 / 1300	400 / 460 V
DTS 3285 WC	10000 - 12000 / 1300	400 / 460 V

For use with cooling water supply up to 45°C

Global Service - Your Local Advantage



Pfannenberg's innovation has made it one of the largest globally operating manufacturers of thermal management and process cooling equipment today. Our wide product range stretches from individual warning and signaling components to complete system solutions for machine cooling and enclosure air conditioning.

We speak your language - In addition to manufacturing facilities located on three continents, Pfannenberg has developed a worldwide network of local subsidiaries and sales partners eager to meet your service needs.

We're there when you need us - Worldwide

Repair service

If your cooling system is down, you can expect immediate assistance from Pfannenberg. Our repair service affords you the fastest possible response – nationally or internationally. We ensure that your cooling system is returned to optimal condition – even if it's not a Pfannenberg product. Our on-site service gets you back on line faster, eliminating the transit time associated with factory repair programs.

We offer you the following services:

Fault diagnostics • Repair cost estimates • On-site repair • Handling and disposal of returned goods.

Pfannenberg Service Centers

in Germany (headquarters), USA, China, UK, Italy, Brazil, France, Russia, Singapore and India

Service Support Centers

visit www.pfannenberg.com/support/service/ for a complete list.

Service Agents

Serving 42 countries on 5 continents



Pfannenberg Incorporated
68 Ward Road, Lancaster, New York 14086 USA
Phone: 716-685-6866 Fax: 716-681-1521

info@pfannenbergusa.com
www.pfannenbergusa.com



Contact Your Local Representative:

Subject to technical amendments and misprints.